


SUGGESTED FLOAT SWITCH POSITIONS

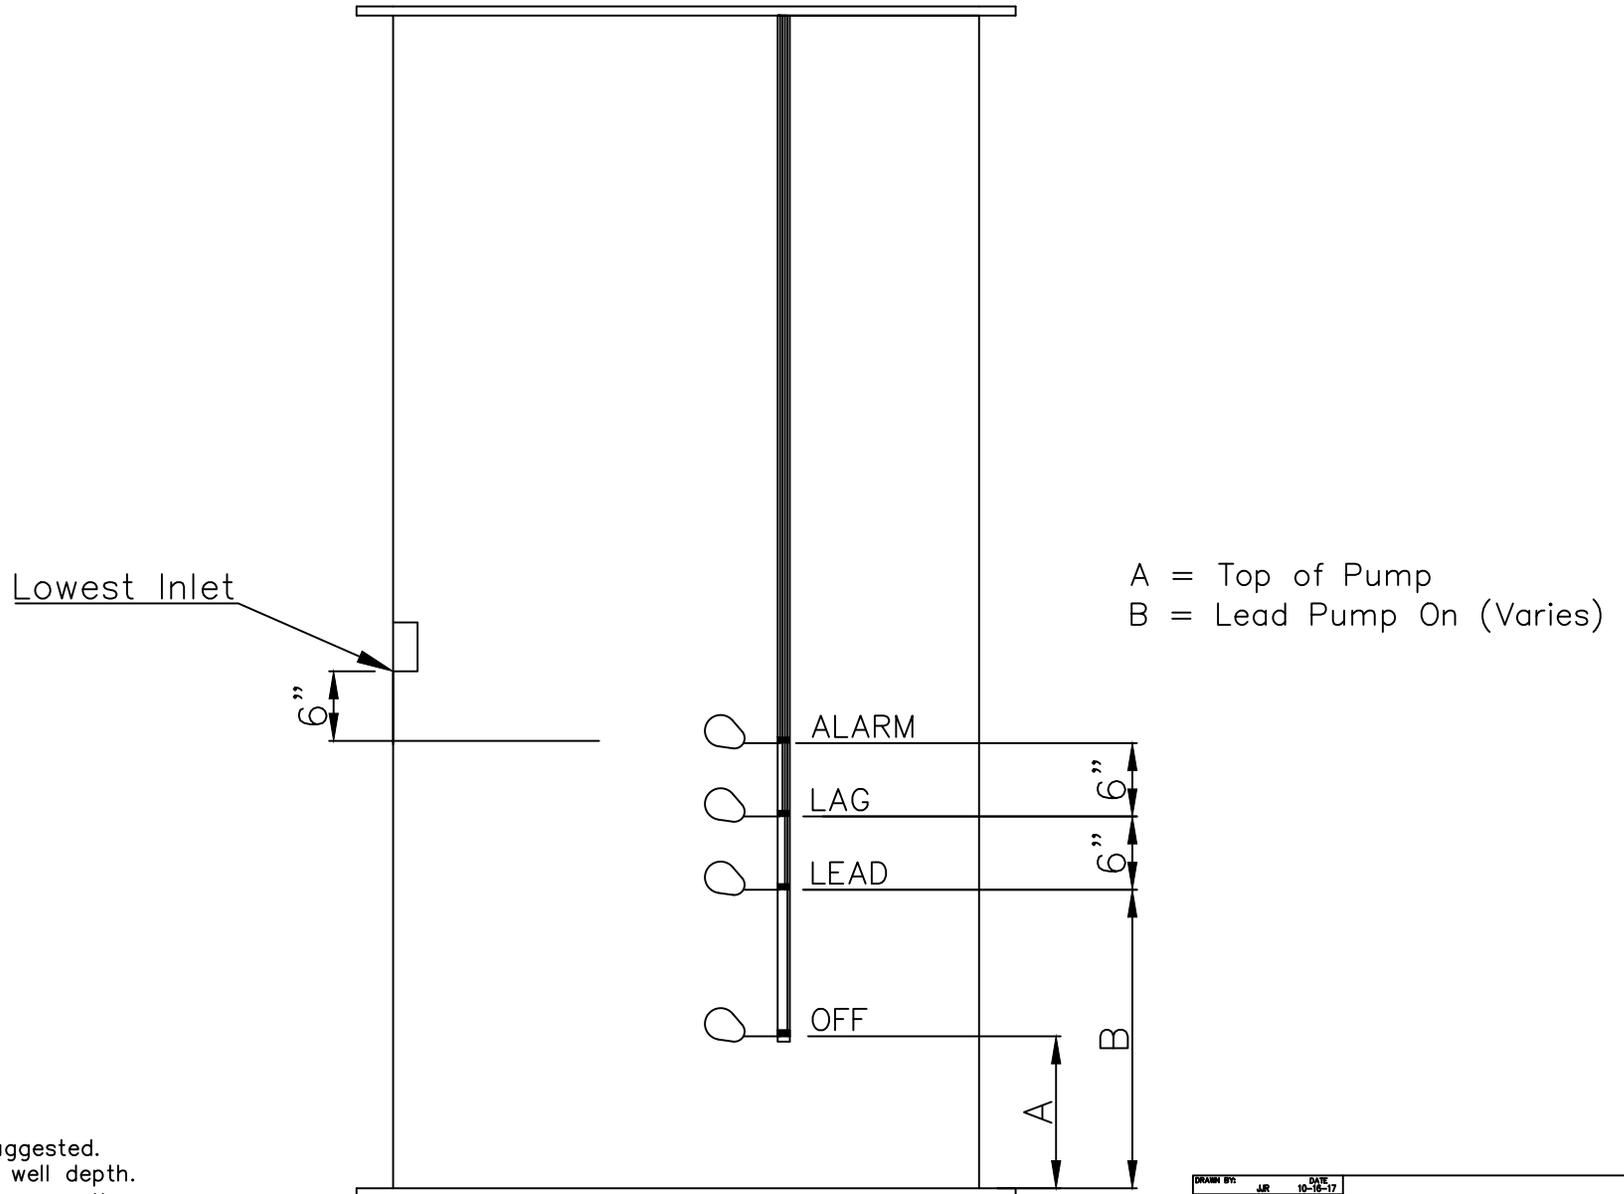

Notes:

- 1.) Measurements are suggested. Adjust based on wet well depth.
- 2.) For simplex systems, move the Lead float to the Lag float position. Delete the Lag Float.

DRAWN BY: JLR	DATE: 10-16-17	Suggested Float Switch Positions			
CHECKED BY: DC	DATE: 10-16-17				
ISSUE DATE: 10-16-17		SIZE: A	FORM NO.	JOB. NO.: -	REV.: A
APPROVED BY: DC	DATE: 10-16-17	SCALE: NONE	SHEET 1 OF 1		