






NOTES:

1. SYSTEM MANIFOLD CONNECTIONS ARE GROOVED. (CLASS 125/150 ANSI FLANGED OPTIONAL)
2. IF OPTIONAL TANK IS PROVIDED, ONE FIELD CONNECTION IS REQUIRED.
3. DATA IS BASED ON A 44 GALLON TANK. REFER TO TANK DRAWINGS FOR DIMENSIONS AND WEIGHTS OF OTHER MODELS.
4. MAXIMUM SYSTEM PRESSURE MUST NOT EXCEED 175 PSIG OR OPTIONAL ADJACENT TANK PRESSURE RATING.
5. RIGHT HAND SYSTEM IS SHOWN. SPECIFY LEFT HAND IF REQUIRED.
6. FOR DIMENSIONS AND DRY WEIGHT CHOOSE THE LARGEST HP PUMP USED IN THE SYSTEM.
7. CUSTOM DIMENSIONS ARE AVAILABLE, CONSULT FACTORY.
8. 6" HEADERS WILL OVERHANG THE "W" DIMENSION BY 2" FOR 10HP AND 15HP SYSTEMS.

HEADER SIZE AND CONNECTION

- 3" IPS PIPE 304 SCHEDULE 10 STAINLESS STEEL
- 4" IPS PIPE 304 SCHEDULE 10 STAINLESS STEEL
- 6" IPS PIPE 304 SCHEDULE 10 STAINLESS STEEL

- GROOVED END (SHOWN)
- CLASS 125/150 ANSI FLANGED (NOT SHOWN)

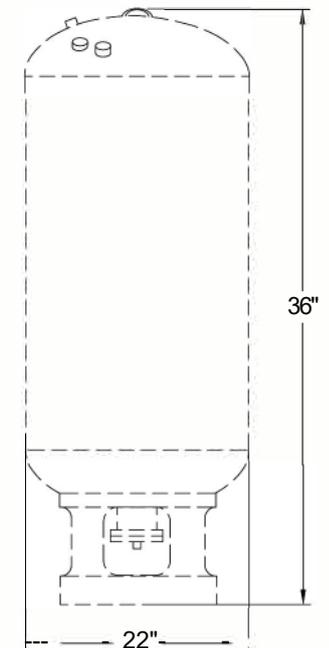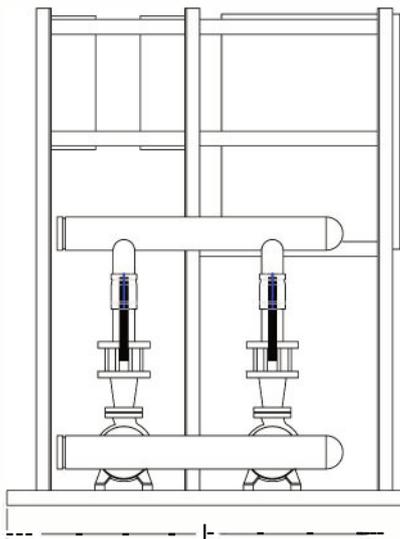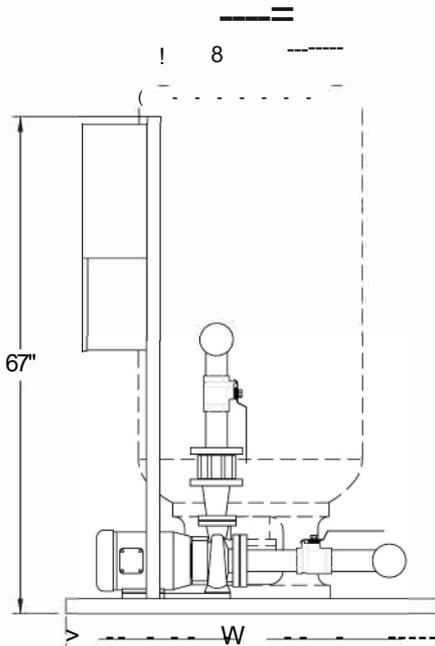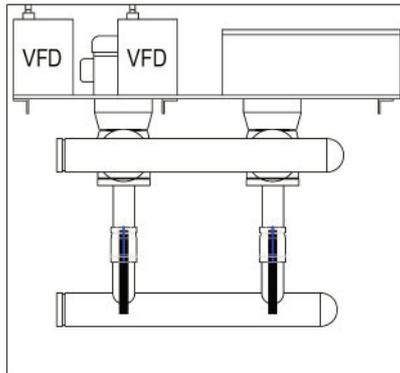

DIMENSIONS IN INCHES (APPROX.)			SYSTEM WEIGHT IN LBS. (APPROX.)	
HORSEPOWER PER PUMP	L	W	WITHOUT TANK	WITH TANK
2 - 7.5 HORSEPOWER	36	34	1000	1150
10 HORSEPOWER	42	34	1100	1250
15 HORSEPOWER	42	34	1500	1650
20 HORSEPOWER	42	40	1700	1850

Not for construction purposes unless certified.

CERTIFIED BY: _____ DATE: _____

VARIABLE SPEED DUPLEX END SUCTION WITH CHECK VALVES

FabPro Systems

AND OPTIONAL REMOTE MOUNTED TANK

DATE: 06/05/21

SCALE: NTS






NOTES:

1. SYSTEM MANIFOLD CONNECTIONS ARE GROOVED. (CLASS 125/150 ANSI FLANGED OPTIONAL)
2. IF OPTIONAL TANK IS PROVIDED, ONE FIELD CONNECTION IS REQUIRED.
3. DATA IS BASED ON A 44 GALLON TANK. REFER TO TANK DRAWINGS FOR DIMENSIONS AND WEIGHTS OF OTHER MODELS.
4. MAXIMUM SYSTEM PRESSURE MUST NOT EXCEED 175 PSIG OR OPTIONAL ADJACENT TANK PRESSURE RATING.
5. RIGHT HAND SYSTEM IS SHOWN. SPECIFY LEFT HAND IF REQUIRED.
6. FOR DIMENSIONS AND DRY WEIGHT CHOOSE THE LARGEST HP PUMP USED IN THE SYSTEM.
7. CUSTOM DIMENSIONS ARE AVAILABLE, CONSULT FACTORY.
8. 6" HEADERS WILL OVERHANG THE "W" DIMENSION BY 2" FOR 10-HP AND 15-HP SYSTEMS.

HEADER SIZE AND CONNECTION

- 3" IPS PIPE 304 SCHEDULE 10 STAINLESS STEEL
- 4" IPS PIPE 304 SCHEDULE 10 STAINLESS STEEL
- 6" IPS PIPE 304 SCHEDULE 10 STAINLESS STEEL

- GROOVED END (SHOWN)
- CLASS 125/150 ANSI FLANGED (NOT SHOWN)

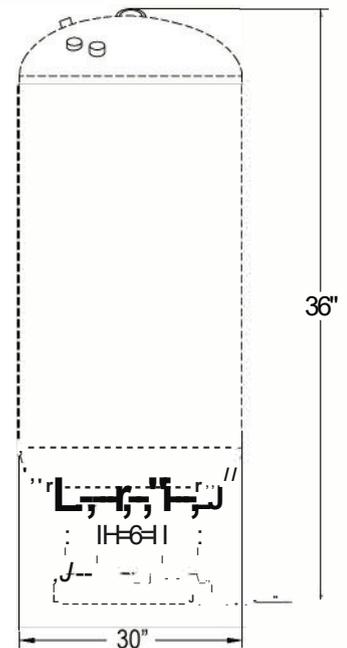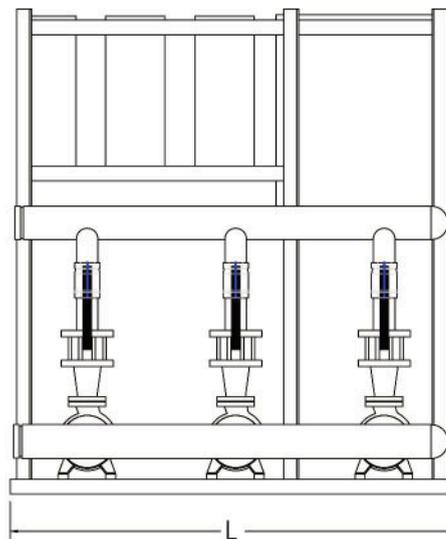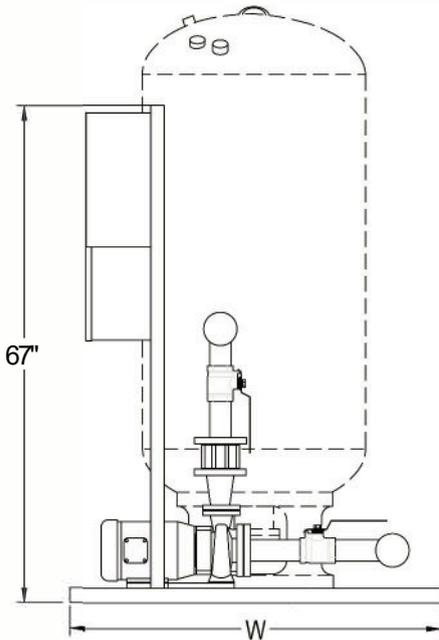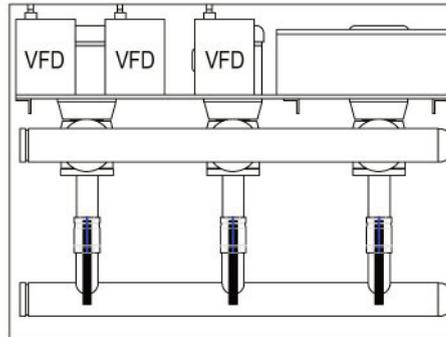

DIMENSIONS IN INCHES (APPROX.)			SYSTEM WEIGHT IN LBS. (APPROX.)	
HORSEPOWER PER PUMP	L	W	WITHOUT TANK	WITH TANK
2-7.5 HORSEPOWER	52	34	1300	1450
10 HORSEPOWER	60	34	1500	1650
15 HORSEPOWER	60	34	2000	2150
20 HORSEPOWER	60	40	2200	2350

Not for construction purposes unless certified.

CERTIFIED BY: _____ DATE: _____

VARIABLE SPEED TRIPLEX END SUCTION WITH CHECK VALVES

FabPro Systems

AND OPTIONAL REMOTE MOUNTED TANK

DATE: 06/05/21

SCALE: NTS